

THE GOAT



TRANSFORM FROM TRIGGER TO HINGE INSTRUCTIONS:

STEP 1



Use a small Phillips head screwdriver to remove the small **silver** panhead screw on the side with only one screw.
(Black anodized aluminum side)

STEP 2

From the opposite side use a .050" allen wrench or something similar to push the 3/32" diameter dowel pin out of the head.


Do not use anything other than your hand pressure!

(Nickel plated brass side of handle)



STEP 3

Use a 5/64" allen wrench to lock the SEAR and TRIGGER locks. Turn Clockwise until tight.
(Black anodized aluminum side)

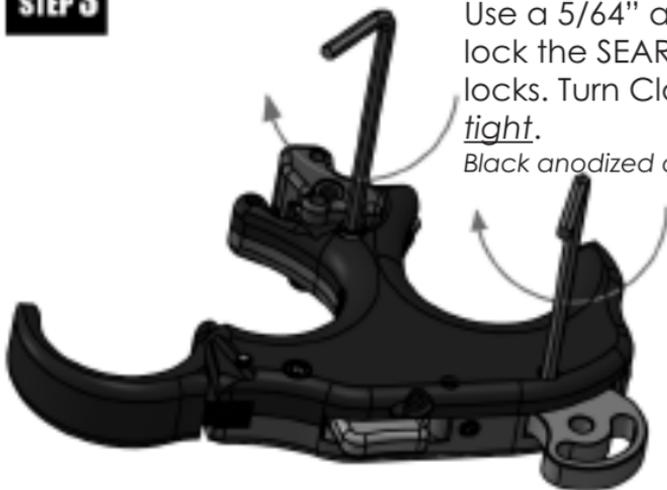

STEP 4

Store the dowel pin and the **silver** panhead screw in the handle for convenience.

